



Laurentian
series



➤ LRT 421-PA2




➤ LRT 420



Laurentian Series

The LRT series fixtures are made of a one-piece injected, UV stabilized, high heat resistant, impact resistant acrylic or polycarbonate prismatic globe with a spun aluminum hood c/w a decorative cast finial. The globe is assembled to a cast aluminum post top adaptor complete with four cast aluminum decorative arms. The lamp and removable ballast assembly are accessible by means of a tool-free QUAD-TURN, quarter-turn locking system. With PA2H and PA4H option the optical assembly stays fastened by a hinge to the fitter, providing a hands-free approach to servicing and accessing the various internal components.


MAINTENANCE

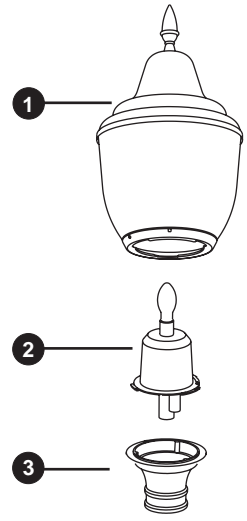

- 1- Head Module
- 2- Ballast / cone Module
- 3- Fitter Module


OPTIC

OP_*N
Non cut-off
Refractor
Vertical lamp



*Type 3 & 5

Option: HS House shield

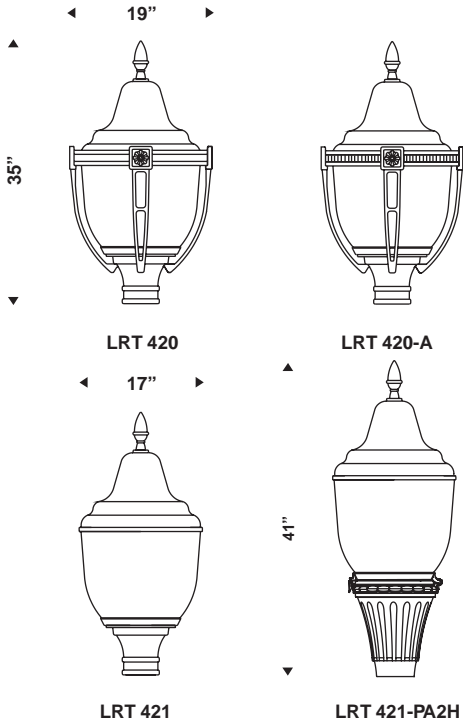

TENON ADPATOR: Ø4" x 3"lg
E.P.A: 1.7 sq ft

WEIGHT: 33 lbs

ORDERING INFO

| PRODUCT | OPTIC | GLOBE | WATT / SOURCE / SOCKET | VOLTAGE | COLOR | OPTION |
|---------|-------|-------|------------------------|---------|-------|--------|
| LRT 421 | OP3N | GAC | 100 MH / MED | 120 | BKTX | PA4H |

GLOBE

GAC: Clear Acrylic Prismatic
GPC: Clear Polycarbonate Prismatic



OPTIONS

FINIALS:



#F1 #F2 #F3 #F4 #F5

FITTERS:



#PBT: Button Type Photocell
#PTL: Twist Lock-Photocell

#AC: Copper Accent
#PTR3: Post Top Reducer Ø3"

#AB: Brass Accent

WATT / SOURCE / SOCKET

| METAL | 50 | MH | Medium |
|--------------------|------|----|----------------|
| HALIDE | 70 | MH | Medium |
| | 100 | MH | Medium |
| | 150 | MH | Medium |
| | 175 | MH | Medium & Mogul |
| *- consult factory | 250* | MH | Mogul |

| HIGH PRESSURE SODIUM | 50 | HPS | Medium |
|----------------------|------|-----|----------------|
| | 70 | HPS | Medium & Mogul |
| | 100 | HPS | Medium & Mogul |
| | 150 | HPS | Medium & Mogul |
| *- consult factory | 250* | HPS | Mogul |

VOLTAGE

Single tap: 120v / 208v / 240v / 277v / 347v / 480v
Dual tap: Dt1/* (120-240v) Dt2/* (120-277v)
Tri tap: Tt1/* (120-208-240v) Tt2/* (120-277-347v)
Quad tap: Qt/* (120-208-240-277v)

* = connected at _____ volts

COLOR

| | | | |
|---------------|--------|---------------|-------------------|
| WH TX | WHITE | RD TX | RED |
| BK TX | BLACK | GY TX | GREY |
| GN TX | GREEN | GND TX | DARK GREEN |
| TAN TX | BEIGE | BU TX | BLUE |
| BZ TX | BRONZE | SY SM | NU SPARKLE SILVER |

EXAMPLE

