



Mission series




➤ **MIS 100S**




➤ **MIS 100**



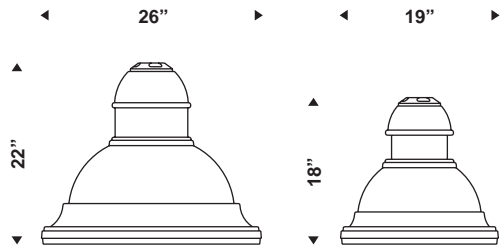

MIS 100

MIS 100S
(max 175 watts)

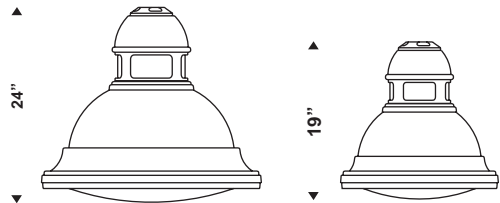

MIS 101

MIS 101S
(max 175 watts)

E.P.A: 1.2 sq ft

WEIGHT: 38 lbs

ORDERING INFO

PRODUCT	OPTIC	LENS	WATT / SOURCE / SOCKET	VOLTAGE	COLOR	OPTION
MIS 100	ORV3C	GGC	100 MH / MED	120	BKTX	PBT

LENS

GGC: Clear Glass
GGS: Clear Sagged Glass Lens

WATT / SOURCE / SOCKET

METAL HALIDE	50	MH	Medium
	70	MH	Medium
	100	MH	Medium
	150	MH	Medium
	175	MH	Medium & Mogul
* consult factory	250*	MH	Mogul

HIGH PRESSURE SODIUM

	50	HPS	Medium
	70	HPS	Medium & Mogul
	100	HPS	Medium & Mogul
	150	HPS	Medium & Mogul
* consult factory	250*	HPS	Mogul

LOW PRESSURE SODIUM

	35*	LPS	Dual Contact
* consult factory	55*	LPS	Dual Contact

VOLTAGE

Single tap: 120v / 208v / 240v / 277v / 347v / 480v
 Dual tap: **Dt1**/* (120-240v) **Dt2**/* (120-277v)
 Tri tap: **Tt1**/* (120-208-240v) **Tt2**/* (120-277-347v)
 Quad tap: **Qt**/* (120-208-240-277v)

* = connected at _____ volts

COLOR

WH TX	WHITE	RD TX	RED
BK TX	BLACK	GY TX	GREY
GN TX	GREEN	GND TX	DARK GREEN
TAN TX	BEIGE	BU TX	BLUE
BZ TX	BRONZE	SY SM	NU SPARKLE SILVER

Mission Series

The MIS100 series fixtures are made of a cast aluminum pendant adaptor and a spun aluminum housing c/w a cast aluminum hinged door. The sag or flat lens is offered in clear or frosted tempered glass. The lamp and removable ballast assembly are accessible by latch and tool-free QUAD-TURN, quarter-turn locking system.



OPTIC

ORH_*C Cut-off Reflector Horizontal lamp		ORV_*C Cut-off Reflector Vertical lamp	
*Type 3 & 5		*Type 3 & 5	
OCB_*F Cut-off Reflector Horizontal lamp			
*Type 1 to 4			

(not available on MIS100S)
*** IP66**
 *- consult factory

MAINTENANCE

1- Head Module
 2- Optic Module
 3- Ballast / cone Module
 4- Lens Module

OPTIONS

PBT: Button type photocell
LR: Luminous ring (MIS101)



EXAMPLE