



**Mission
series**





➤ **MIS 210**



➤ **MIS 200**




Mission Series

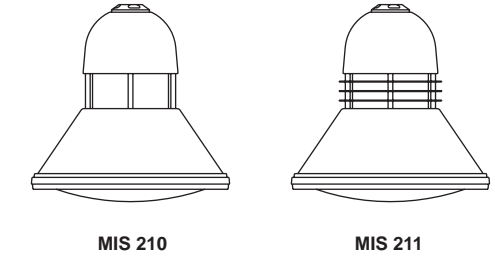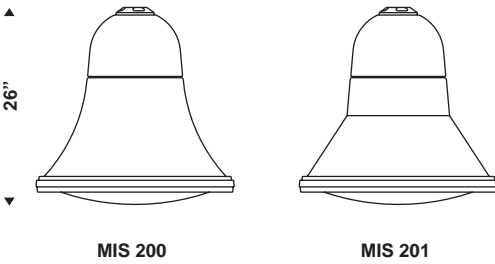

E.P.A: 2.1 sq ft

WEIGHT: 45 lbs

The MIS200 fixtures are made of a cast aluminum pendant adaptor and a spun aluminum housing c/w a cast aluminum hinged door. The sag or flat lens is offered in clear or frosted tempered glass. The lamp and removable ballast assembly are accessible by means of a captive screw and tool-free QUAD-TURN, quarter-turn locking system. The MIS211 fixture offers a luminous ring surrounded by an aluminum decorative external louvers.

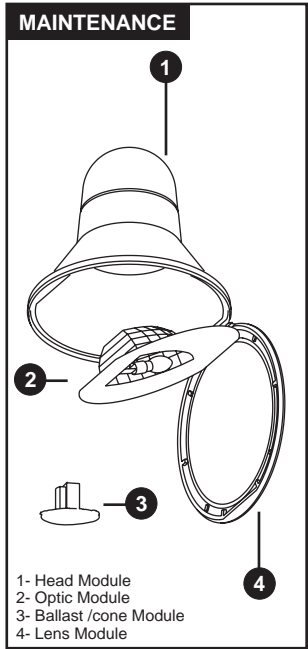

OPTIC

ORH *C
Cut-off Reflector Horizontal lamp



*Type 3 & 5

ORV *C
Cut-off Reflector Vertical lamp



*Type 3 & 5

OCB *F
Cut-off Reflector Horizontal lamp
* IP66



*Type 1 to 4


*- consult factory

ORDERING INFO

PRODUCT	OPTIC	LENS	WATT / SOURCE / SOCKET	VOLTAGE	COLOR	OPTION
MIS 200	ORV3C	GGC	100 MH / MED	120	BKTX	PBT

LENS

GAC:	Clear Acrylic
GPC:	Clear Polycarbonate
GGC:	Clear Glass
GGS:	Clear Sagged Glass Lens



OPTIONS

PBT: Button type photocell

LR: Luminous ring (available only MIS210-MIS211)

WATT / SOURCE / SOCKET

METAL	WATT	SOURCE	SOCKET
HALIDE	50	MH	Medium
	70	MH	Medium
	100	MH	Medium
	150	MH	Medium
	175	MH	Medium & Mogul
	250*	MH	Mogul

*- consult factory

HIGH PRESSURE SODIUM

METAL	WATT	SOURCE	SOCKET
	50	HPS	Medium
	70	HPS	Medium & Mogul
	100	HPS	Medium & Mogul
	150	HPS	Medium & Mogul
	250*	HPS	Mogul

*- consult factory

VOLTAGE

Single tap: 120v / 208v / 240v / 277v / 347v / 480v
 Dual tap: Dt1/* (120-240v) Dt2/* (120-277v)
 Tri tap: Tt1/* (120-208-240v) Tt2/* (120-277-347v)
 Quad tap: Qt/* (120-208-240-277v)

* = connected at _____ volts

COLOR

WH TX	WHITE	RD TX	RED
BK TX	BLACK	GY TX	GREY
GN TX	GREEN	GND TX	DARK GREEN
TAN TX	BEIGE	BU TX	BLUE
BZ TX	BRONZE	SY SM	NU SPARKLE SILVER

