







**Mission**  
series



➤ **MIS 600**

# Mission Series

The side mounted MIS400 and MIS600 feature a spun aluminum housing with a cast hinged lens frame. A choice of latched flat or sagged lenses is available. Tool-free access entry to lamp and ballast is standard on all MISSION SERIES luminaire and all models can be ordered with an IP66 compliant optical assembly. All exposed hardware is stainless steel.

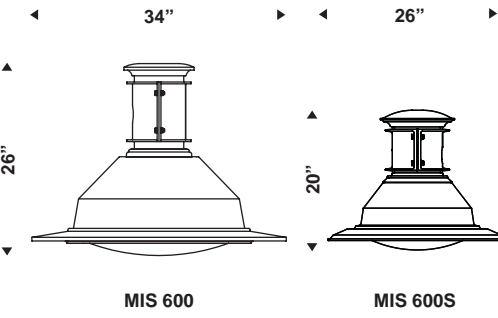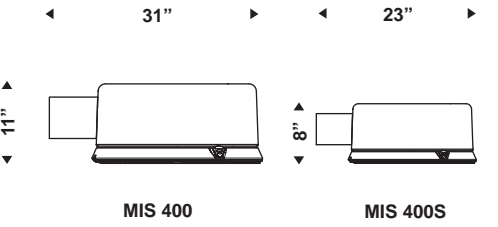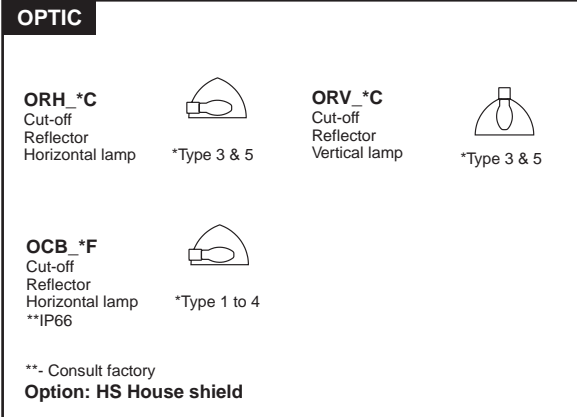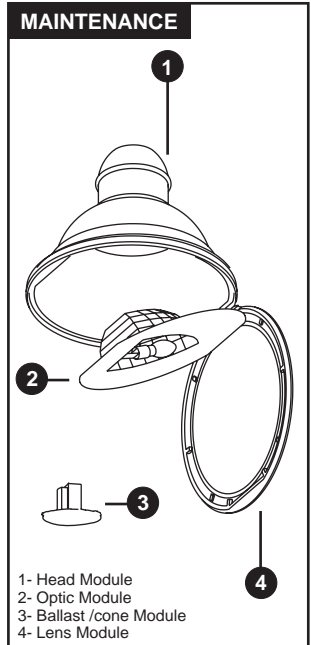

E.P.A: 2.2 sq ft  
WEIGHT: 50 lbs

E.P.A: 1.6 sq ft  
WEIGHT: 37 lbs

**ORDERING INFO**

PRODUCT	OPTIC	LENS	WATT / SOURCE / SOCKET	VOLTAGE	COLOR	OPTION
MIS 600	ORV3C	GGC	100 MH / MED	120	BKTX	PBT

**LENS**

**GGC:** Clear Glass  
**GGS:** Clear Sagged Glass Lens

**WATT / SOURCE / SOCKET**

<b>METAL HALIDE</b>	50	MH	Medium
	70	MH	Medium
	100	MH	Medium
	150	MH	Medium
	175	MH	Medium & Mogul
* consult factory	250*	MH	Mogul
<b>HIGH PRESSURE SODIUM</b>	50	HPS	Medium
	70	HPS	Medium & Mogul
	100	HPS	Medium & Mogul
	150	HPS	Medium & Mogul
* consult factory	250*	HPS	Mogul
<b>LOW PRESSURE SODIUM</b>	35*	LPS	Dual Contact
* consult factory	55*	LPS	Dual Contact

**VOLTAGE**

Single tap: 120v / 208v / 240v / 277v / 347v / 480v  
 Dual tap: Dt1/\* (120-240v) Dt2/\* (120-277v)  
 Tri tap: Tt1/\* (120-208-240v) Tt2/\* (120-277-347v)  
 Quad tap: Qt/\* (120-208-240-277v)

\* = connected at \_\_\_\_\_ volts

**COLOR**

<b>WH TX</b>	WHITE	<b>RD TX</b>	RED
<b>BK TX</b>	BLACK	<b>GY TX</b>	GREY
<b>GN TX</b>	GREEN	<b>GND TX</b>	DARK GREEN
<b>TAN TX</b>	BEIGE	<b>BU TX</b>	BLUE
<b>BZ TX</b>	BRONZE	<b>SY SM</b>	NU SPARKLE SILVER

**OPTIONS**

**PBT: Button type photocell**

