



**Provincial
series**



➤ **PRO 600-SPK**




➤ **PRO 600**



Provincial Series

The PRO600 series fixtures are made of a one-piece hexagonal cast aluminum tapered hood and spun aluminum cupola and cast finial. The housing is made of a tapered hexagonal one-piece aluminum casting c/w an integrated hinge and six lenses. The housing is assembled to a cast aluminum pole adaptor. The PA3 option offers a cast yoke-mount pole adaptor. The lamp and removable ballast assembly are accessible by means of a captive screw and tool-free QUAD-TURN, quarter-turn locking system.

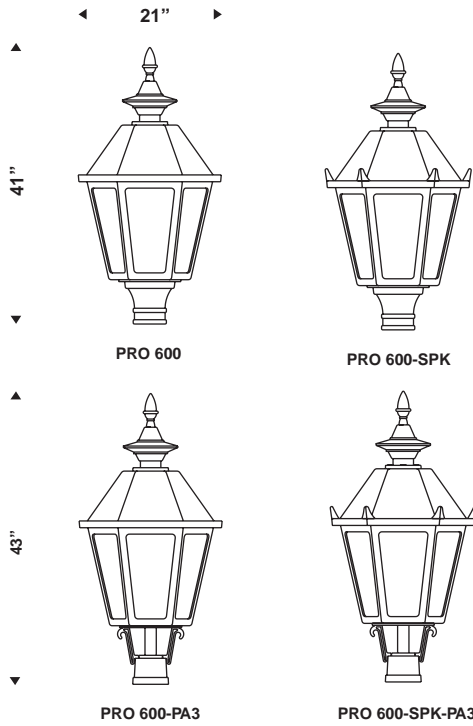

PRO 600

PRO 600-SPK

PRO 600-PA3

PRO 600-SPK-PA3

TENON ADPATOR: Ø4" x 3"lg
E.P.A: 2.65 sq ft

WEIGHT: 48 lbs

ORDERING INFO








PRODUCT	OPTIC	LENS	WATT / SOURCE / SOCKET	VOLTAGE	COLOR	OPTION
PRO 600	ORH3C	GGC	100 MH / MED	120	BK TX	AC

LENS


GAC:	Clear Acrylic
GPC:	Clear Polycarbonate
GAO:	Opal Acrylic
GPO:	Opal Polycarbonate
GGC:	Clear Glass





OPTIC

ORH_*C** Cut-off Reflector Horizontal lamp		OC_*N NON Cut-off Reflector & Refractor Vertical lamp	
ORV_*C** Cut-off Reflector Vertical lamp		OLS_*S Semi cut-off Louvers System (compact version) Vertical lamp	
OG_*N NON Cut-off Glass Refractor Vertical lamp		OCB_*F Cut-off Reflector Horizontal lamp ***IP66	
		NO5N NON Cut-off Vertical lamp	

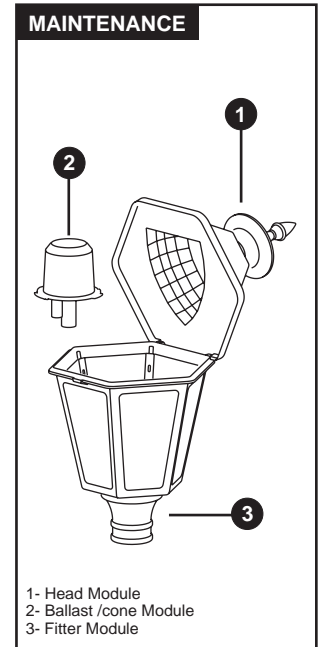** comes with decorative glass chimney
*** consult factory
Option: HS House shield



OPTIONS

FINIALS:		FITTERS:	
#F1 #F2 #F3 #F4 #F5		#PA1 #PA3	
#PBT: Button Type Photocell	#AC: Copper Accent	#AB: Brass Accent	
#PTL: Twist Lock-Photocell	#PTR3: Post Top Reducer Ø3"	#SPK: Decorative spike	

WATT / SOURCE / SOCKET

METAL	50	MH	Medium
HALIDE	70	MH	Medium
	100	MH	Medium
	150	MH	Medium
	175	MH	Medium & Mogul
* consult factory	250*	MH	Mogul

HIGH PRESSURE SODIUM

	50	HPS	Medium
	70	HPS	Medium & Mogul
	100	HPS	Medium & Mogul
	150	HPS	Medium & Mogul
* consult factory	250*	HPS	Mogul


VOLTAGE

Single tap: 120v / 208v / 240v / 277v / 347v / 480v
Dual tap: Dt1/* (120-240v) Dt2/* (120-277v)
Tri tap: Tt1/* (120-208-240v) Tt2/* (120-277-347v)
Quad tap: Qt/* (120-208-240-277v)

* = connected at _____ volts

COLOR


WH TX	WHITE	RD TX	RED
BK TX	BLACK	GY TX	GREY
GN TX	GREEN	GND TX	DARK GREEN
TAN TX	BEIGE	BU TX	BLUE
BZ TX	BRONZE	SY SM	NU SPARKLE SILVER

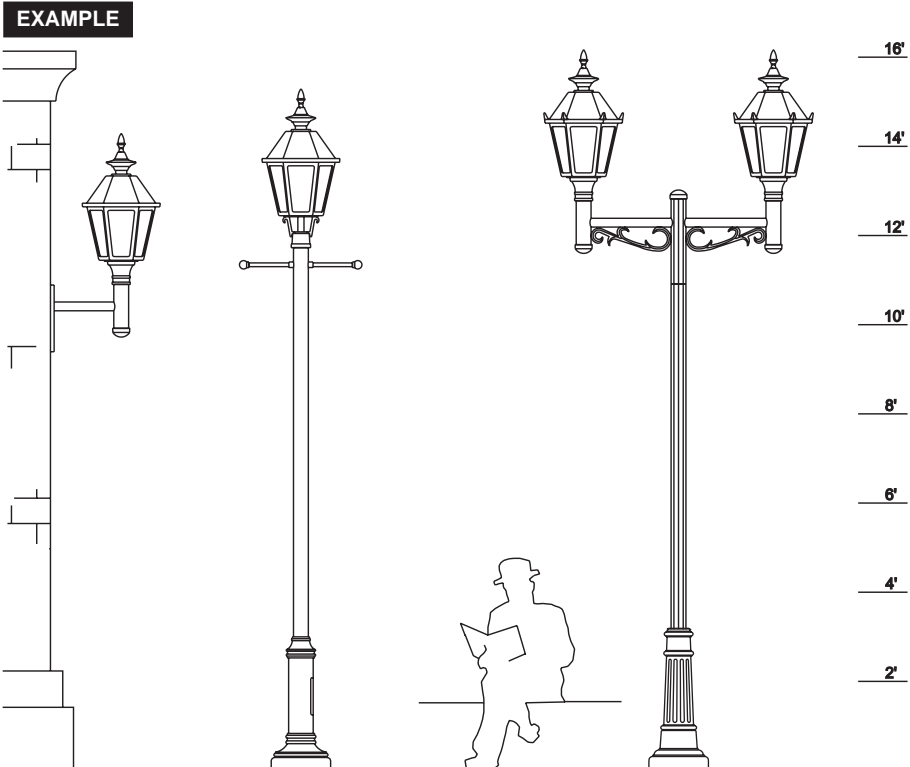

Provincial Series

The PRO640 series fixtures are made of a one-piece spun aluminum tapered hood and spun aluminum cupola and cast finial. The housing is made of a tapered hexagonal one-piece aluminum casting c/w an integrated hinge and six lenses. The housing is assembled to a cast aluminum pole adaptor. The PA3 option offers a cast yoke-mount pole adaptor. The lamp and removable ballast assembly are accessible by means of a captive screw and tool-free QUAD-TURN, quarter-turn locking system.

MAINTENANCE

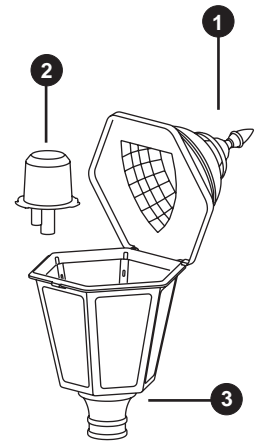

- 1- Head Module
- 2- Ballast /cone Module
- 3- Fitter Module

OPTIC

ORH_*C**
Cut-off Reflector Horizontal lamp



*Type 3 & 5

OC_*N
NON Cut-off Reflector & Refractor Vertical lamp



*Type 3 & 5

ORV_*C**
Cut-off Reflector Vertical lamp



*Type 3 & 5

OLS_*S
Semi cut-off Louvers System (compact version) Vertical lamp



*Type 3 & 5

OG_*N
NON Cut-off Glass Refractor Vertical lamp



*Type 3 & 5

OCB_*F
Cut-off Reflector Horizontal lamp
**IP66



*Type 1 to 4


NO5N
NON Cut-off Vertical lamp




Type 5

** - comes with decorative glass chimney
*** - consult factory


Option: HS House shield

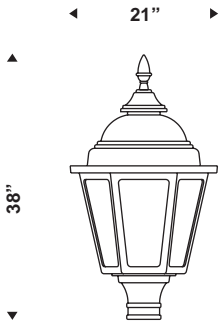


PRO 640



PRO 640-SPK

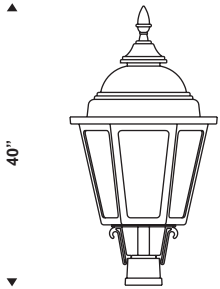

PRO 640-PA3



PRO 640-SPK-PA3

TENON ADPATOR: Ø4" x 3"lg
E.P.A: 2.6 sq ft

WEIGHT: 40 lbs

ORDERING INFO

PRODUCT	OPTIC	LENS	WATT / SOURCE / SOCKET	VOLTAGE	COLOR	OPTION
PRO 640	ORH3C	GGC	100 MH / MED	120	BK TX	AC

LENS

GAC: Clear Acrylic
GPC: Clear Polycarbonate
GAO: Opal Acrylic
GPO: Opal Polycarbonate
GGC: Clear Glass



OPTIONS

FINIALS:



#F1 #F2 #F3 #F4 #F5

FITTERS:



#PA1 #PA3

#PBT: Button Type Photocell

#PTL: Twist Lock-Photocell

#AC: Copper Accent

#PTR3: Post Top Reducer Ø3"

#AB: Brass Accent

#SPK: Decorative spike

WATT / SOURCE / SOCKET

METAL	50	MH	Medium
HALIDE	70	MH	Medium
	100	MH	Medium
	150	MH	Medium
	175	MH	Medium & Mogul
- consult factory	250	MH	Mogul

HIGH PRESSURE SODIUM	50	HPS	Medium
	70	HPS	Medium & Mogul
	100	HPS	Medium & Mogul
	150	HPS	Medium & Mogul
- consult factory	250	HPS	Mogul

VOLTAGE


Single tap: 120v / 208v / 240v / 277v / 347v / 480v
Dual tap: Dt1/* (120-240v) Dt2/* (120-277v)
Tri tap: Tt1/* (120-208-240v) Tt2/* (120-277-347v)
Quad tap: Qt/* (120-208-240-277v)

* = connected at _____ volts

COLOR

WH TX WHITE	RD TX RED
BK TX BLACK	GY TX GREY
GN TX GREEN	GND TX DARK GREEN
TAN TX BEIGE	BU TX BLUE
BZ TX BRONZE	SY SM NU SPARKLE SILVER

EXAMPLE

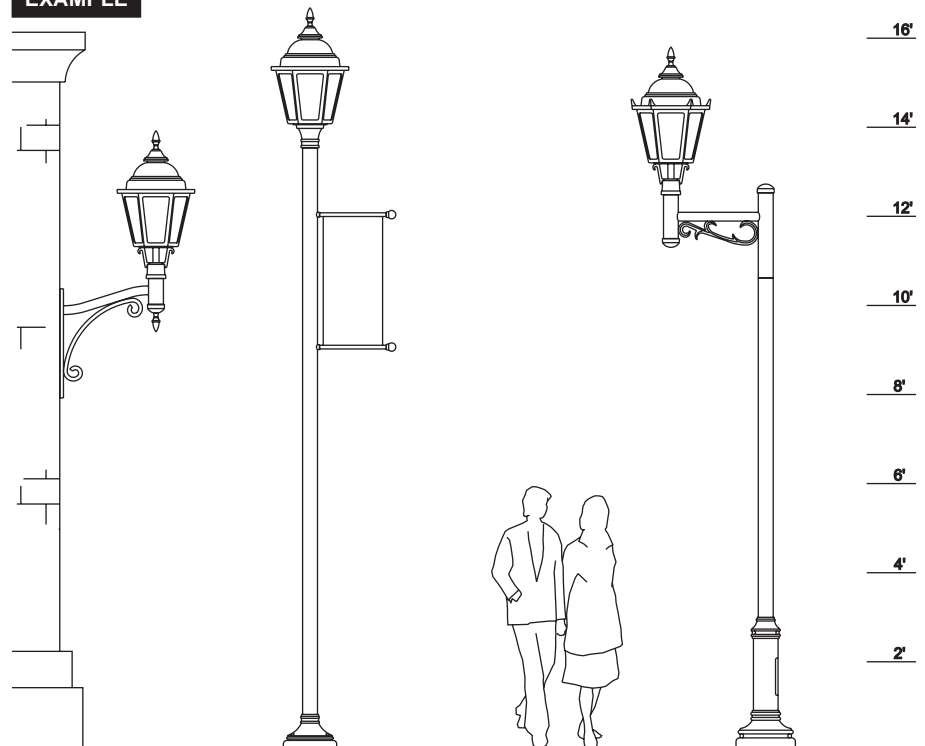



**Provincial
series**



➤ PRO 640



➤ PRO 640-SPK

