






QUATTRO

CARGO

series



CAR100

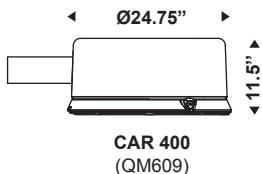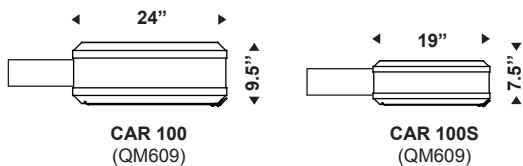

WEIGHT: 50 lbs
E.P.A: 2.2 sq ft

WEIGHT: 37 lbs
E.P.A: 1.6 sq ft

Cargo Series



QUATTRO


www.quattrolighting.com

The Cargo 100 Series fixtures are made of a square housing composed of heavy aluminum laser cutting and extruded aluminum shape. A cast aluminum door is assembled by means of an integrated hinge and locked by a latch. The yoke mount is designed to fit onto a 4" outside diameter pole or else, with the addition of a post top reducer, it could fit other pole dimensions. CAR400 and CAR400S Series fixtures are made of a round housing composed of heavy spun aluminum hood and cast aluminum frame. A cast aluminum door is assembled by means of an integrated hinge and locked by two latches. CAR100 and CAR400 Series offer tool-free and hands-free access to the inside of the luminaire.

OPTIC

OCB * Full Cut-Off Reflector Horizontal lamp IP66 Rated	 *Type 1 to 4	L * Full Cut-Off LED Module IP66 Rated	 *Type 3 & 5
GRH * Full Cut-Off Reflector Horizontal lamp IP66 Rated (Only available for CAR100 and CAR400)	 *Type 2 or 3	ORH3 Full Cut-Off Reflector Horizontal lamp Type 3 (Only available for CAR100S and CAR400S)	


MAINTENANCE

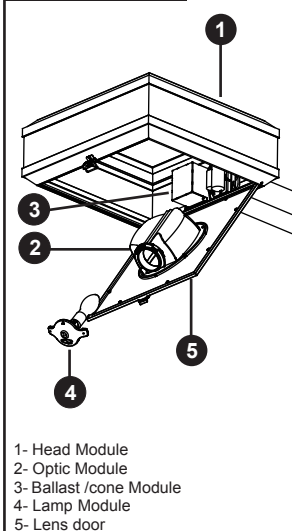

ORDERING INFO

PRODUCT (LUMINAIRE)	OPTIC	LENS	WATT / SOURCE / SOCKET	VOLTAGE	COLOR	INSTALLATION TYPE	OPTION
CAR100	OCB3	GGC	100 MH / MED	120	BKTX	PAY	PBT
PRODUCT (ARM)	CONFIGURATION	COLOR	OPTION				
QM609	1A	BKTX	PBT				

CONFIGURATIONS

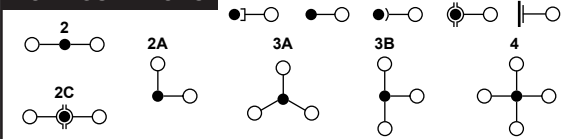

VOLTAGE

SINGLE TAP: 120 / 208 / 240 / 277 / 347 / 480

DUAL TAP: DT1/_* (120-240) * = connected at
DT2/_* (120-277) _____ volts

TRI TAP: TT1/_* (120-208-240)
TT2/_* (120-277-347)

QUAD TAP: QT/_* (120-208-240-277)

LENS

GGC: Clear Tempered Flat Glass
GGB: Brushed Tempered Flat Glass
GGSC: Clear Glass Sagged Lens (only available for CAR400 and CAR400S)
GGSB: Brushed Glass Sagged Lens (only available for CAR400 and CAR400S)

WATT / SOURCE / SOCKET

METAL HALIDE	50 / 70 / 100 / 150 / 175	MH	MED	(Medium: OCB)
	70 / 100 / 150	MH	MOG	(Mogul: OCB)
	175 / 250 / 400	MH	MOG	(Mogul: GRH or ORH)

Options: /EL Electronic Ballast
/D_* Step Dimming *6, 8 or 10 hours

45 / 60 / 90 / 140	MH	PGZ12
210 / 315	MH	PGZ18

Options: /D_* Step Dimming *6, 8 or 10 hours

HIGH PRESSURE SODIUM	35 / 50 / 70 / 100 / 150	HPS	MED	(Medium: OCB)
	50 / 70 / 100 / 150	HPS	MOG	(Mogul: OCB)
	200 / 250 / 400	HPS	MOG	(Mogul: GRH or ORH)

LED	35 / 55 / 70	LEDD	(TYPE 3 & 5)
	31 / 45 / 48 / 65 / 68 / 91 / 99 / 140	LEDF	(TYPE 3 & 5)
	140	LEDE	(TYPE 3 & 5)

COLOR

TEXTURED FINISH	FINE TEXTURED FINISH
BKTX Black	BKST Black
BZTX Bronze	ANST Anthracite
GNDTX Dark Green	GYST Grey
GNTX Green	SANST Metallic Sand
BUTX Blue	
RDTX Red	SMOOTH FINISH
GYTX Grey	SYSM Nu Sparkle Silver
TANTX Tan	
WHTX White	

INSTALLATION TYPE (WITHOUT ARM)

PAW: Wall mount **PAY:** Yoke mount

ARMS	QM609: 9 in length arm	(Many arm length available, consult Quattro)
	QM618: 18 in length arm	
	QM624: 24 in length arm	

OPTIONS	CAR100 & CAR100S; Color accent edge stripe are available, consult Quattro's representative to select a color.
PBT: Button type photocell	
PTL: Twist lock photocell receptacle	
PTL1: Twist lock photocell receptacle c/w painted cover	
PTR: Post top reducer (yoke mount installation)	