



QUATTRO

COBRA
series



COB100

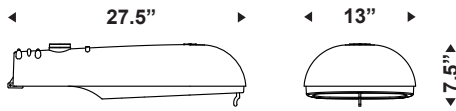

COB 100

Cobra Series



QUATTRO

www.quattrolighting.com

The Cobra 100 fixture is made of a fixed upper housing and articulated bottom door. Both are made of cast aluminum. The door is assembled to the housing by means of an integrated hinge and locked by a rotary latch. A clear or brushed tempered flat glass lens is offered. Regarding LED device configurations, no need for lens because the LED device is a whole unit and meets the IP66 standard. Fits on standard 2 3/8" outside diameter mounting arm and secured by 2 flanges c/w bolts and split washers. The head module allows adjustable installation that can varied +/- 4 degrees relative to the arm. Optional: Button type photocell or twist lock photocell receptacle with or without painted cover (make selection).

OPTIC

OCB *
Full Cut-Off Reflector Horizontal lamp
IP66 Rated



*Type 1 to 4

L_*
Full Cut-Off LED Module
IP66 Rated




*Type 3 & 5

QRH3
Full Cut-Off Reflector Horizontal lamp



Type 3

MAINTENANCE

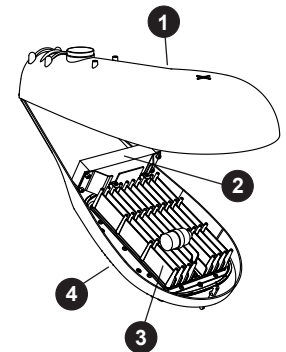

- 1- Head Module
- 2- Ballast Module
- 3- LED Module
- 4- Lens Module

E.P.A: 1.4 sq ft

WEIGHT: 27 lbs

ORDERING INFO

PRODUCT	OPTIC	LENS	WATT / SOURCE / SOCKET	VOLTAGE	COLOR	ARM ADAPTER	OPTION
COB100	OCB3	GGC	100 MH / MED	120	BKTX	PA238	PTL

LENS

GGC: Clear Tempered Flat Glass Lens
GGB: Brushed Tempered Flat Glass Lens

VOLTAGE

SINGLE TAP: **120 / 208 / 240 / 277 / 347 / 480**
DUAL TAP: **DT1/_* (120-240)**
DT2/_* (120-277)
TRI TAP: **TT1/_* (120-208-240)**
TT2/_* (120-277-347)
QUAD TAP: **QT/_* (120-208-240-277)**

* = connected at _____ volts

WATT / SOURCE / SOCKET

METAL HALIDE **50 / 70 / 100 / 150 / 175** MH **MED** (Medium: OCB Optic)
70 / 100 / 150 MH **MOG** (Mogul: OCB Optic)
175 / 250 / 400 MH **MOG** (Mogul: QRH Optic)

Options: /EL Electronic Ballast
/D_* Step Dimming *6, 8 or 10 hours

45 / 60 / 90 / 140 MH **PGZ12**
210 / 315 MH **PGZ18**

Options: /D_* Step Dimming *6, 8 or 10 hours

COLOR

TEXTURED FINISH		FINE TEXTURED FINISH	
BKTX Black	BKST Black	ANST Anthracite	GYST Grey
BZTX Bronze	ANST Anthracite	GYST Grey	SANST Metallic Sand
GNDTX Dark Green	GYTX Green	SANST Metallic Sand	
GNTX Green	BUTX Blue		
BUTX Blue	RDTX Red		
RDTX Red	GYTX Grey		
GYTX Grey	TANTX Tan		
TANTX Tan	WHTX White		
WHTX White			

HIGH PRESSURE SODIUM **35 / 50 / 70 / 100 / 150** HPS **MED** (Medium: OCB Optic)
50 / 70 / 100 / 150 HPS **MOG** (Mogul: OCB Optic)
200 / 250 / 400 HPS **MOG** (Mogul: QRH Optic)

ARM ADAPTER

PA238: Fits on 2 3/8" O.D. arm

LED **35 / 55 / 70** **LEDD** (TYPE 3 & 5)
31 / 45 / 48 / 65 / 68 / 91 / 99 / 140 **LEDF** (TYPE 3 & 5)
140 **LEDE** (TYPE 3 & 5)

OPTIONS

- PBT:** Button type photocell
- PTL:** Twist lock photocell receptacle
- PTL1:** Twist lock photocell receptacle with painted cover