



QUATTRO


HORIZON
series

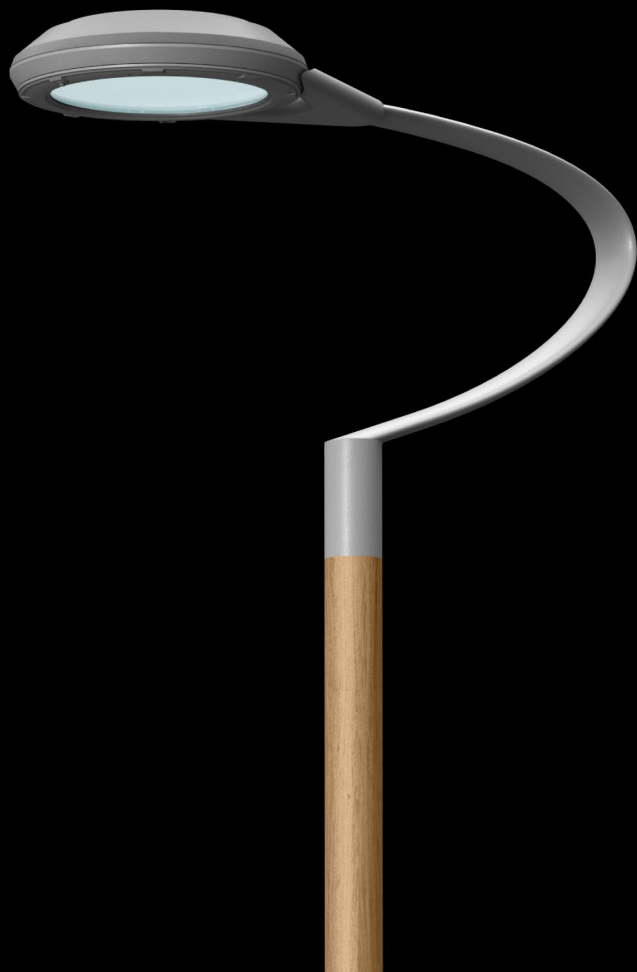


HOZ200

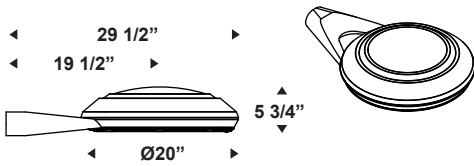

HOZ 200 - PA238

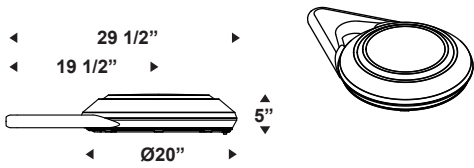

HOZ 210 - PAO

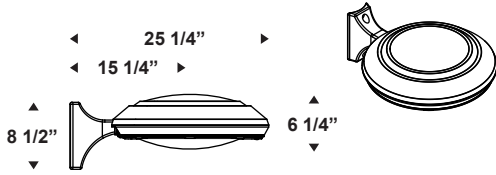

HOZ 200 - PA6RP - GGSC

Horizon Series



QUATTRO

www.quattrolighting.com

The HOZ200 and 210 series fixtures are made of cast aluminum frame and housing surmounted of a heavy gauge spun aluminum hood. The door is assembled by means of an integrated hinge. A push button system allows a tools-free and hands-free access to the LED device or lamp and ballast assembly. This luminaire offers three types of lateral adapter; a standard 2 3/8" outside diameter mounting arm adapter, a 4" x 1 5/16" oval mounting arm adapter and a 6" round pole adapter (see codification). The Horizon series offer clear or brushed, flat or sagged, tempered glass lens. Regarding LED device configurations, no need for lens because the LED device is a whole unit and meets the IP66 standard. Optional: Button type photocell or twist lock photocell receptacle with or without photocell cover (make selection). Also, a different color finish may be used for the hood (make selection).

OPTIC

OCB *
Full cut-off
Reflector
Horizontal lamp
IP66 Rated
(Only available for HOZ200)




*Type 1 to 4

L *
Full cut-off
LED Module
IP66 Rated



*Type 3 & 5

MAINTENANCE

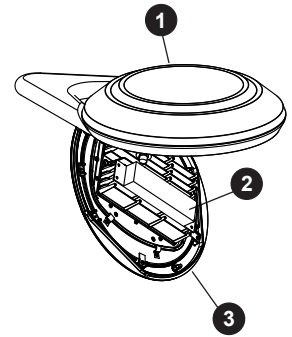

1- Head Module
2- Ballast Module
3- Lens Module

E.P.A: 1.1 sq ft

WEIGHT: 21 lbs

ORDERING INFO

PRODUCT	OPTIC	LENS	WATT / SOURCE / SOCKET	VOLTAGE	COLOR	ARM ADAPTER	OPTION
HOZ200	OCB3	GGC	100 MH / MED	120	BKTX	PA238	PBT

LENS

- GGC:** Clear Tempered Flat Glass
- GGB:** Brushed Tempered Flat Glass
- GGSC:** Clear Tempered Sagged Glass Lens
- GGSB:** Brushed Tempered Sagged Glass Lens

VOLTAGE

- SINGLE TAP: **120 / 208 / 240 / 277 / 347 / 480**
- DUAL TAP: **DT1/ _ * (120-240)** * = connected at
DT2/ _ * (120-277) _____ volts
- TRI TAP: **TT1/ _ * (120-208-240)**
TT2/ _ * (120-277-347)
- QUAD TAP: **QT/ _ * (120-208-240-277)**

WATT / SOURCE / SOCKET

METAL HALIDE **50 / 70 / 100 / 150 MH MED (Medium)**

Options: /EL Electronic Ballast
/D_* Step Dimming *6, 8 or 10 hours

45 / 60 / 90 / 140 MH PGZ12

Options: /D_* Step Dimming *6, 8 or 10 hours

HIGH PRESSURE SODIUM **70 / 100 HPS MED (Medium)**

LED **35 / 55 / 70 LEDD (TYPE 3 & 5)**
31 / 45 / 48 / 65 / 68 / 91 / 99 / 140 LEDF (TYPE 3 & 5)
140 LEDE (TYPE 3 & 5)

COLOR

TEXTURED FINISH		FINE TEXTURED FINISH	
BKTX Black	BKST Black	ANST Anthracite	GYST Grey
BZTX Bronze	ANST Anthracite	GYST Grey	SANST Metallic Sand
GNDTX Dark Green	GYST Grey	SANST Metallic Sand	
GNTX Green			
BUTX Blue			
RDTX Red			
GYTX Grey			
TANTX Tan			
WHTX White			
		SMOOTH FINISH	
		SYSM Nu Sparkle Silver	

ARM ADAPTER

- PA238:** Fits on 2 3/8" O.D. arm
- PAO:** Fits on 4" x 1 5/16" oval mounting arm
- PA6RP:** Fits on 6" O.D. arm

OPTIONS

- PBT:** Button type photocell
- PTL:** Twist lock photocell receptacle
- PTL1:** Twist lock photocell receptacle c/w painted cover
- AD:** Accent color dome