

Ordering # Wall thickness


AFM84 A 0.125"

AFM84 E 0.250"


Pole Guide

8 5/8" Ø to 4" Ø
Fluted, Bottleneck
Aluminum

AFM84



HEIGHT ▶

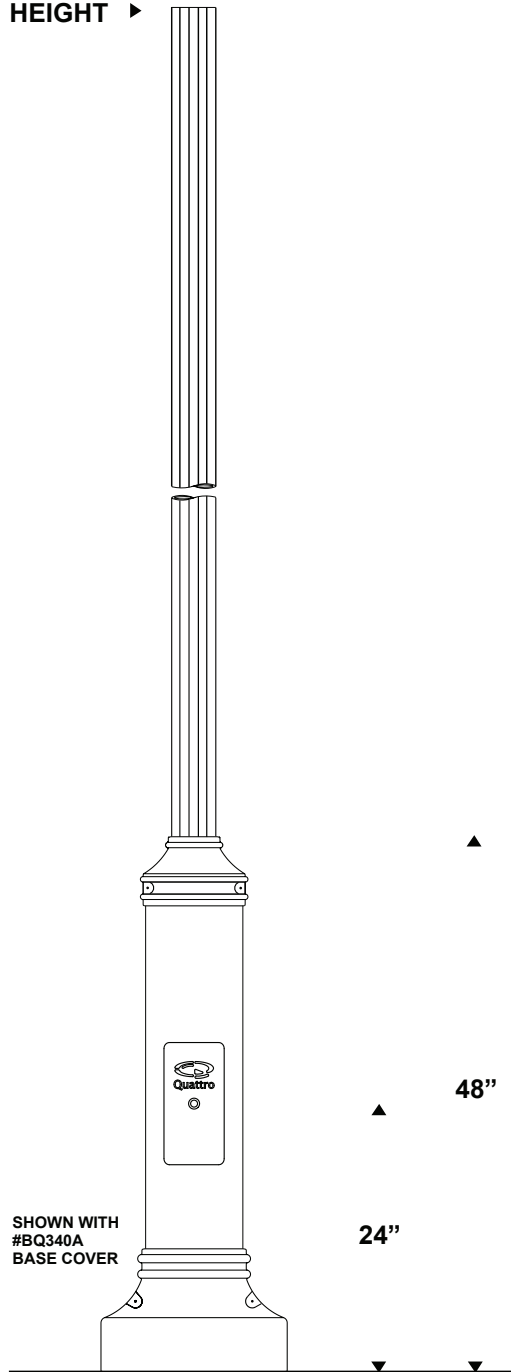


ORDERING INFO


POLE	HEIGHT	BASE COVER	COLOR	OPTION
AFM84A	12	BQ340A	BKTX	GFI

Bottleneck Ø8 5/8" to 4" outside diameter fluted pole. The upper shaft, made of a Ø4" extruded aluminum 12-flute tube, is welded over a round Ø8 5/8" extruded aluminum tube c/w welded reinforcing rings. The pole assembly is welded to a heavy cast aluminum anchor plate. A cast aluminum access door covers a 4" x 9" hand hole located at 24" from anchor plate. C/w weatherproof gasket, hex socket head cap screw and ground bolt opposite to the door.

ANCHOR PLATE DETAIL

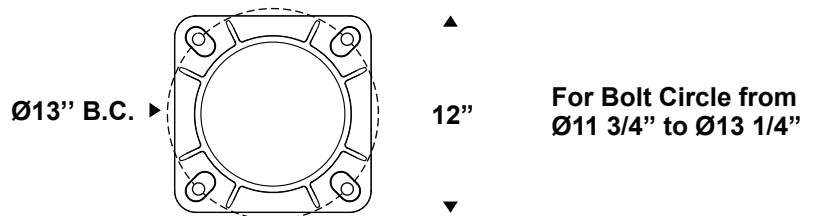

INSTALLATION DETAIL

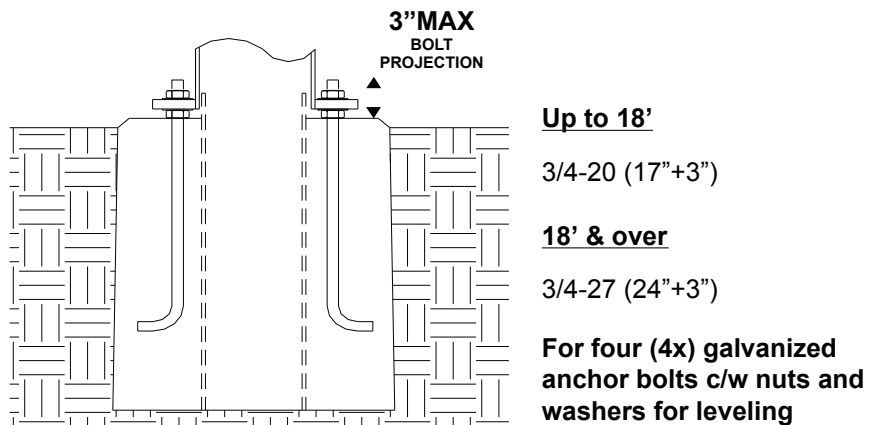

OPTIONS

LF1 Single In-Line Fusing	TP Tamper Proof Screw (Access Door)
LF2 Double In-Line Fusing	PBT Button Type Photocell
DR Duplex Receptacle c/w Cover	PTL Twist Lock Photocell Receptacle
GFI Duplex Receptacle c/w Ground Fault Interrupter and Cover	PTL1 Twist Lock Photocell Receptacle c/w Painted Photocell Cover

COLOR

Consult color chart

QUATTRO
www.quattrolighting.com