

Ordering #      Wall thickness  
**# STP64 J**      **0.1196" (11 Ga)**  
**# STP64 K**      **0.1793" ( 7 Ga)**


## Pole Guide

Round  
Tapered  
Steel

# STP64


### ORDERING INFO

POLE	HEIGHT	BASE COVER	COLOR	OPTION
STP64J	14	BQ311	BKTX	GFI




Round tapered steel pole made from a ASTM A595 Grade-A conical tube. The base is welded to a steel anchor plate. A 4" by 9" hand hole is located at 18" from anchor plate c/w ground bolt. Cast aluminum door provided with weatherproof gasket and hex socket head cap screw.


Dimensions can vary: Contact Quattro technical sales representative for available bottom and top diameters and heights.

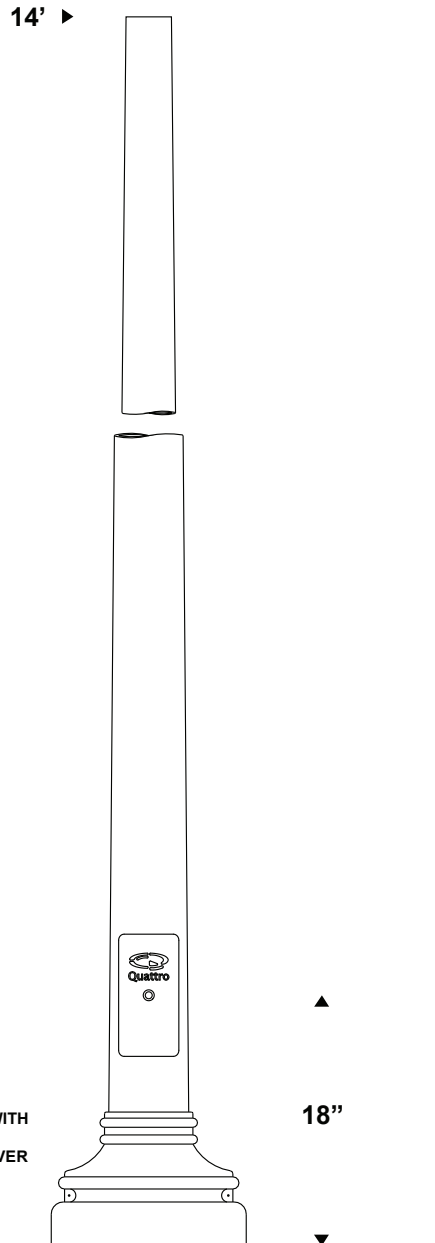

### ANCHOR PLATE DETAIL

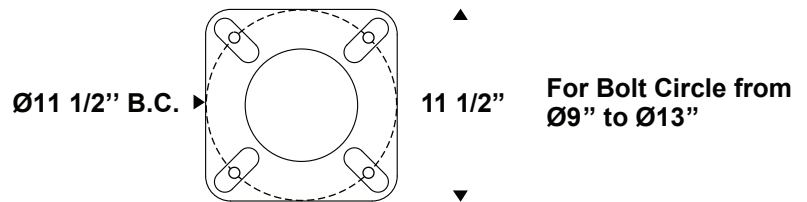

### INSTALLATION DETAIL

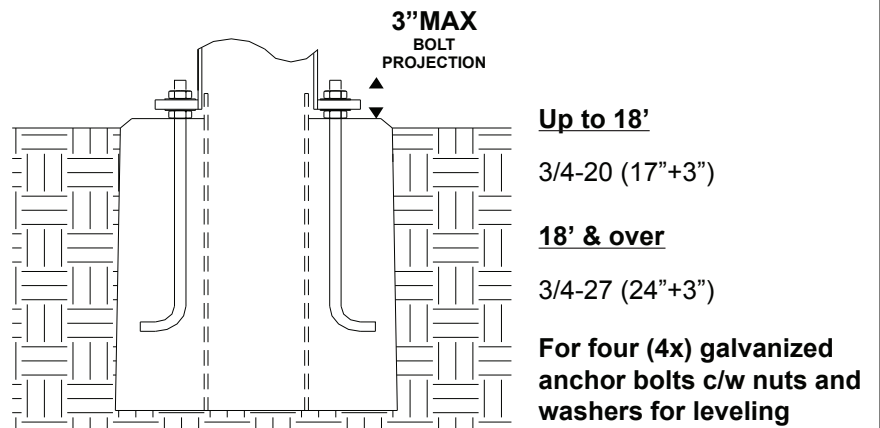

### OPTIONS

<b>LF1</b> Single In-Line Fusing	<b>GALV</b> Galvanized
<b>LF2</b> Double In-Line Fusing	<b>TP</b> Tamper Proof Screw (Access Door)
<b>DR</b> Duplex Receptacle c/w Cover	<b>PBT</b> Button Type Photocell
<b>GFI</b> Duplex Receptacle c/w Ground Fault Interrupter and Cover	<b>PTL</b> Twist Lock Photocell Receptacle
	<b>PTL1</b> Twist Lock Photocell Receptacle c/w Painted Photocell Cover

### COLOR

Consult color chart

**QUATTRO**  
www.quattrolighting.com