

Ordering #	Wall thickness
# SP4 A	0.125"
# SP4 C	0.188"
# SP4 E	0.250"
# SP4 H	0.226/SCH40
# SP4 I	0.318/SCH80

Pole Guide


4"
Round
Steel

SP4


ORDERING INFO

POLE	HEIGHT	BASE COVER	COLOR	OPTION
SP4A	12'6"	BQ311	BKTX	GFI


4" outside diameter pole made from a one piece high-tensile steel, rolled and sealed by a vertical flattened welding. The tube is welded to a steel anchor plate. An aluminum access door covers a hand hole (2" x 4.5") located at 22" from anchor plate. Complete with weatherproof gasket, pan phillips head type screws and ground bolt opposite to the door.




HEIGHT ▶

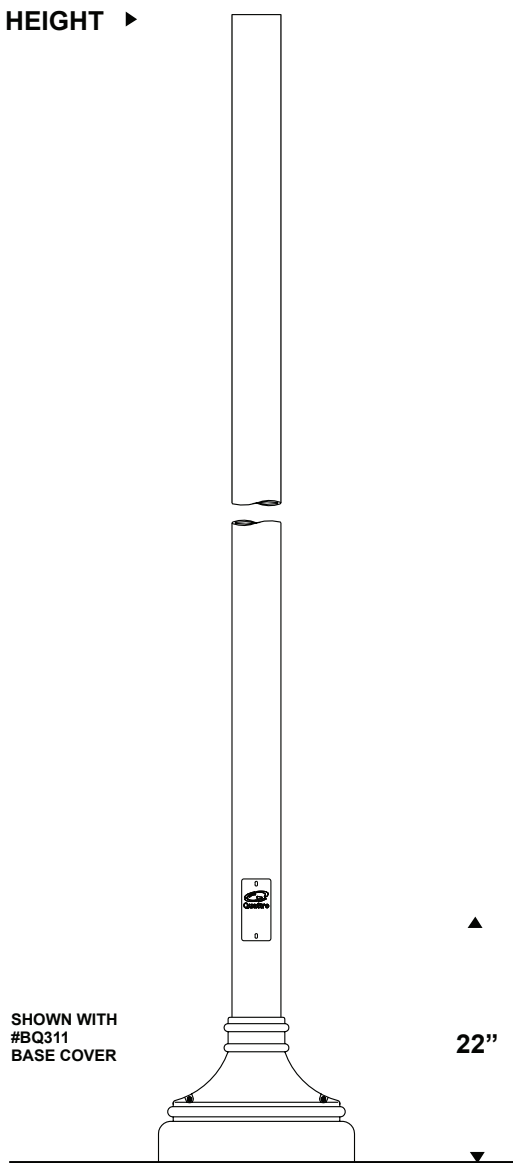

ANCHOR PLATE DETAIL

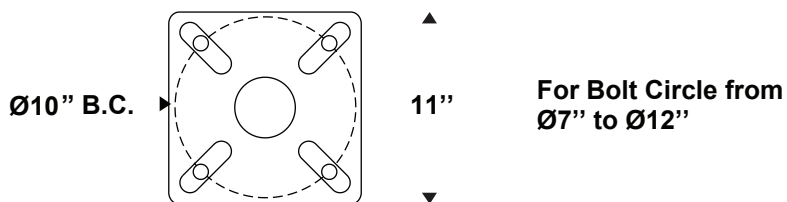

INSTALLATION DETAIL

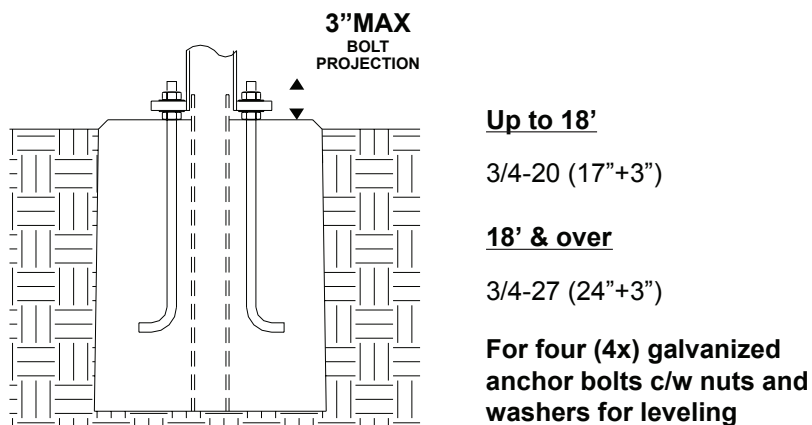

OPTIONS

	GALV Galvanized
LF1 Single In-Line Fusing	TP Tamper Proof Screw (Access Door)
LF2 Double In-Line Fusing	PBT Button Type Photocell
DR Duplex Receptacle c/w Cover	PTL Twist Lock Photocell Receptacle
GFI Duplex Receptacle c/w Ground Fault Interrupter and Cover	PTL1 Twist Lock Photocell Receptacle c/w Painted Photocell Cover

COLOR

Consult color chart

QUATTRO
www.quattrolighting.com