

Ordering #


Wall thickness

AF4 A


0.125"

AF4 E

0.250"



HEIGHT ▶

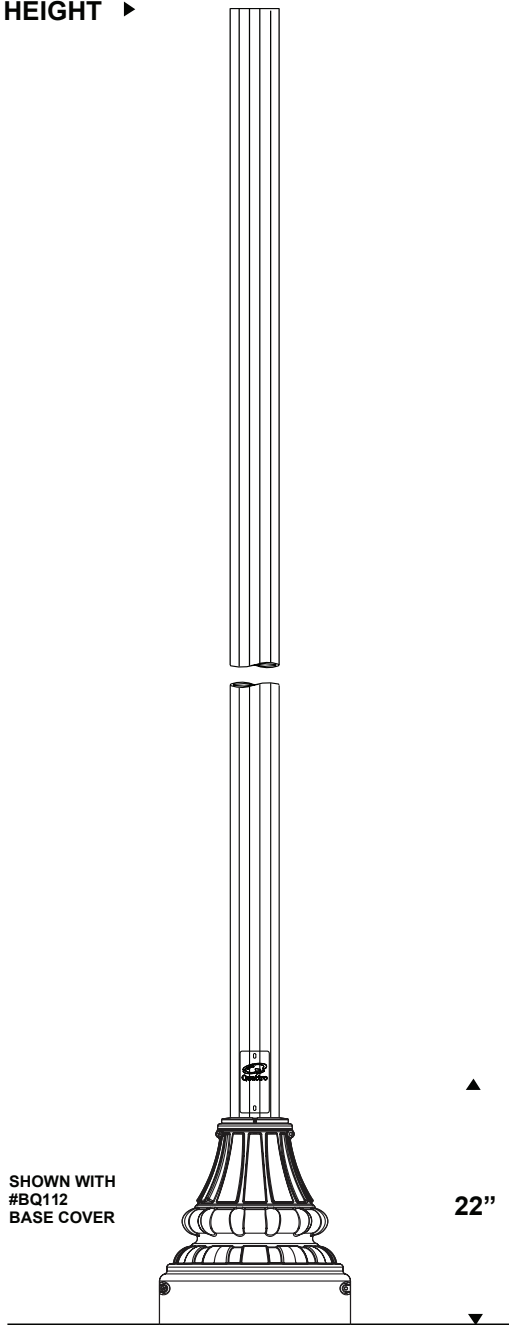

SHOWN WITH #BQ112 BASE COVER

22"

Pole Guide

4" Round Fluted Aluminum


AF4

ORDERING INFO


POLE	HEIGHT	BASE COVER	COLOR	OPTION
AF4A	12	BQ112	BKTX	GFI

4" outside diameter pole made from a reinforced 12-flute extruded aluminum tube welded to a cast aluminum anchor plate. A fluted cast aluminum access door covers a hand hole (2" x 4.5") located at 22" from anchor plate. Complete with weatherproof gasket, pan phillips head type screws and ground bolt opposite to the door.

ANCHOR PLATE DETAIL

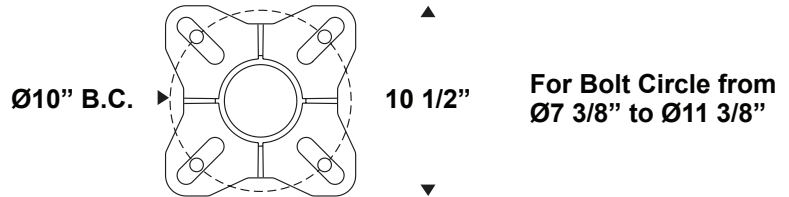

INSTALLATION DETAIL

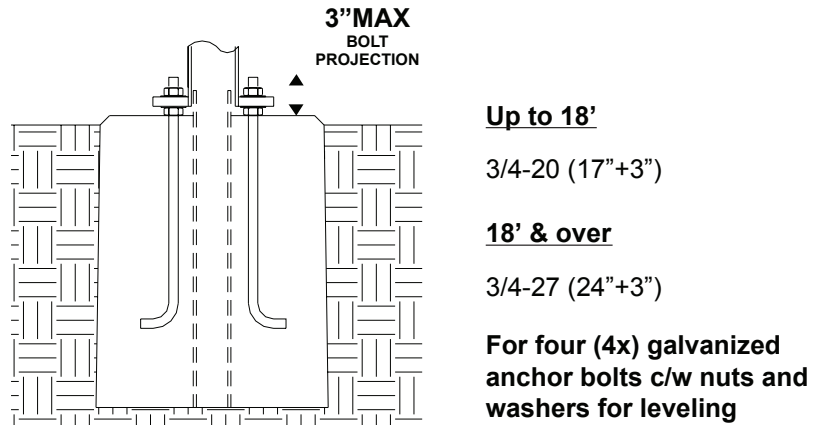

OPTIONS

LF1 Single In-Line Fusing	TP Tamper Proof Screw (Access Door)
LF2 Double In-Line Fusing	PBT Button Type Photocell
DR Duplex Receptacle c/w Cover	PTL Twist Lock Photocell Receptacle
GFI Duplex Receptacle c/w Ground Fault Interrupter and Cover	PTL1 Twist Lock Photocell Receptacle c/w Painted Photocell Cover

COLOR

Consult color chart

QUATTRO
www.quattrolighting.com