

Ordering # Wall thickness
AFFM64 A **0.125"**
AFFM64 E **0.250"**


Pole Guide

6 5/8"Ø to 4"Ø
 Fluted
 Bottleneck
 Aluminum


AFFM64

ORDERING INFO

POLE	HEIGHT	BASE COVER	COLOR	OPTION
AFFM64A	12	BQ311A	BKTX	GFI




HEIGHT ▶

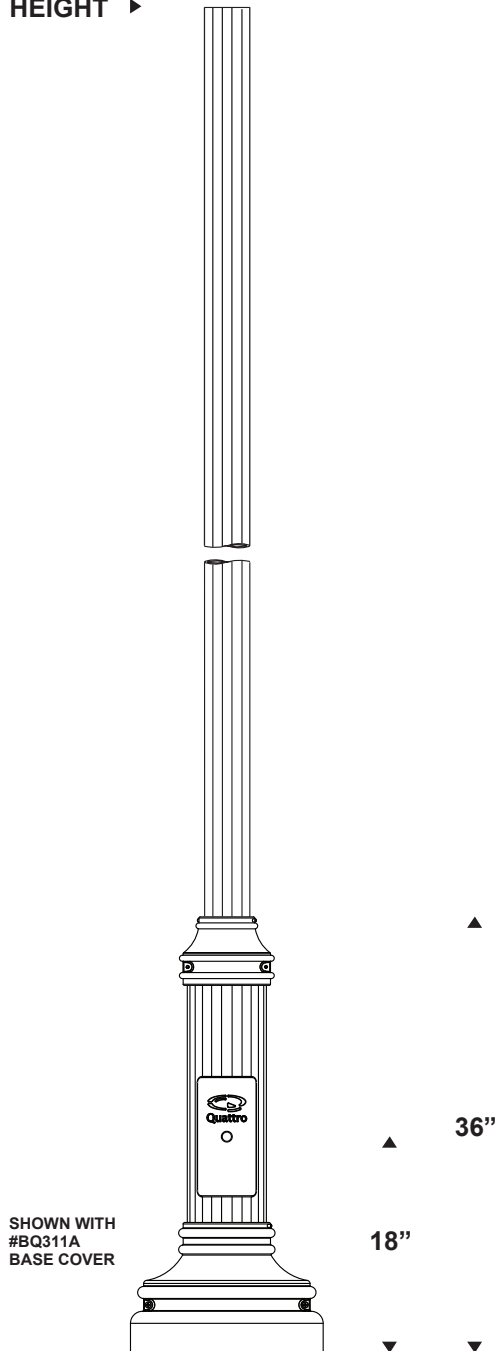


Bottleneck Ø6 5/8" to 4" outside diameter fluted pole. The upper shaft, made of a Ø4" extruded aluminum 12-flute tube, is welded over a second round extruded aluminum 12-flute tube of Ø6 5/8" c/w welded reinforcing rings. The pole assembly is welded to a heavy cast aluminum anchor plate. A cast aluminum access door covers a 4" x 9" hand hole located at 18" from anchor plate. C/w weatherproof gasket, hex socket head cap screw and ground bolt opposite to the door.

ANCHOR PLATE DETAIL

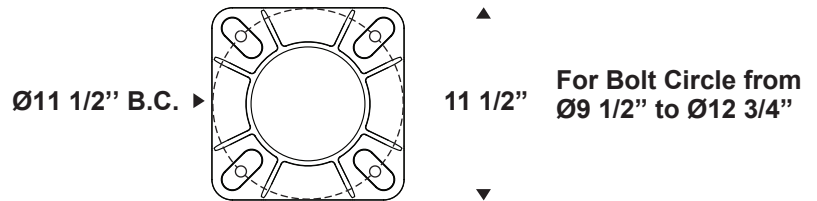

INSTALLATION DETAIL

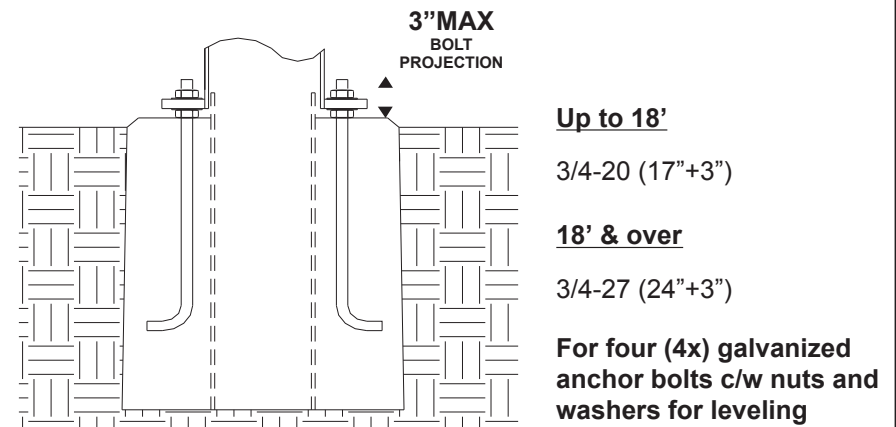

OPTIONS

LF1 Single In-Line Fusing	TP Tamper Proof Screw (Access Door)
LF2 Double In-Line Fusing	PBT Button Type Photocell
DR Duplex Receptacle c/w Cover	PTL Twist Lock Photocell Receptacle
GFI Duplex Receptacle c/w Ground Fault Interrupter and Cover	PTL1 Twist Lock Photocell Receptacle c/w Painted Photocell Cover

COLOR

Consult color chart

QUATTRO
 www.quattrolighting.com