

# QUATTRO

## PROVINCIAL series



PRO650S

◀ 17.75" ▶

▲  
29.25"  
▼



**PRO 600S**  
(PA6)

▲  
32.75"  
▼



**PRO 600S**  
(PA1)

▲  
39"  
▼



**PRO 610S**

▲  
30.25"  
▼



**PRO 611S**

◀ 16" ▶

▲  
29"  
▼



**PRO 650S**

▲  
20.25"  
▼



**PRO 651S**

E.P.A: 2.51 sq ft  
WEIGHT: 45 lbs

# Provincial Series



# QUATTRO

www.quattrolighting.com

The PRO600S series fixtures are made of a cast aluminum hexagonal tapered housing and hood provided with a decorative spun aluminum cupola and a cast aluminum finial. The head module is welded to a post top fitter. Both proposed fitters are designed to fit onto a 4" outside diameter pole or else, with the addition of a post top reducer, it could fit other pole dimensions. The opening hinged system provided with a latch allows a tool free and hands free access to the lamp and ballast or LED device and driver. PRO610S and PRO611S offer a side mount (continuity of a 2"x2" mounting arm). PRO650S and PRO651S offer a suspended mount.

## OPTIC

### ORH\_\*

Full cut-off Reflector  
Horizontal lamp  
Decorative glass chimney or silver painted cone



\*Type 3 & 5

### OCB\_\*

Full cut-off Reflector  
Horizontal lamp  
Decorative glass chimney or silver painted cone



\*Type 1, 2, 3 & 4

### ORV\_\*

Semi cut-off Reflector  
Vertical lamp  
Decorative glass chimney or silver painted cone



\*Type 3 & 5

### OG\_\*

OG\_\*/QS (IP66)  
Non cut-off  
Glass refractor  
Vertical lamp



\*Type 3 & 5

### OLS\_\*

Semi cut-off  
Louvers System  
Vertical lamp



\*Type 3 & 5

### NO5

NO5/QS (IP66)  
Non cut-off  
Vertical lamp



Type 5


### L\_\*(IP66)

Full cut-off  
LED Module  
Decorative glass chimney or silver painted cone



\*Type 3 & 5

## MAINTENANCE

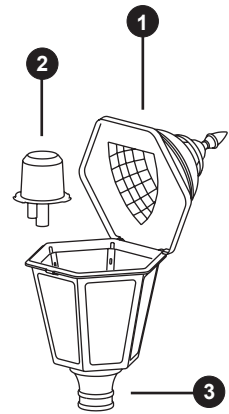

1- Head Module  
2- Ballast / cone Module  
3- Fitter Module

## ORDERING INFO

PRODUCT	OPTIC	LENS	WATT / SOURCE / SOCKET	VOLTAGE	COLOR	FITTER	FINIAL	OPTION
PRO600S	OG3/QS	GPC	70 MH / MED	120	BKTX	PA6	F1	AC

## LENS

IP66 THERMOFORMED GLOBE (QS)

IP54 LENS ASSEMBLY

**GAC:** Clear Acrylic

**GAC:** Clear Acrylic

**GAF:** Frosted Acrylic

**GPC:** Clear Polycarbonate

**GPC:** Clear Polycarbonate

**GGC:** Clear Glass

**GAO:** Opal Acrylic

**GAO:** Opal Acrylic

**GGB:** Brushed Glass

**GPO:** Opal Polycarbonate

**GPO:** Opal Polycarbonate

**GAB:** Brushed Acrylic

**GAB:** Brushed Acrylic

## VOLTAGE

SINGLE TAP: 120 / 208 / 240 / 277 / 347 / 480

DUAL TAP: DT1/\_\* (120-240) \* = connected at  
DT2/\_\* (120-277) \_\_\_\_\_ volts

TRI TAP: TT1/\_\* (120-208-240)  
TT2/\_\* (120-277-347)

QUAD TAP: QT/\_\* (120-208-240-277)

## WATT / SOURCE / SOCKET

METAL HALIDE 50 / 70 / 100 / 150 / 175  
70 / 100 / 150  
70 / 100 / 150 / 250 / 400

MH MED (Medium)  
MH MOG (Mogul: OG/QS-NO/QS)  
MH MOG (Mogul: OG-NO)

Options: /EL Electronic Ballast  
/D\_\* Step Dimming \*6, 8 or 10 hours

45 / 60 / 90 / 140 MH PGZ12  
210 / 315 MH PGZ18

Options: /D\_\* Step Dimming \*6, 8 or 10 hours

HIGH PRESSURE SODIUM 35 / 50 / 70 / 100 / 150  
50 / 70 / 100  
50 / 70 / 100 / 150 / 200 / 250 / 400

HPS MED (Medium: OCB-ORH-ORV-OLS-OG/QS-NO/QS)  
HPS MOG (Mogul: OG/QS-NO/QS)  
HPS MOG (Mogul: OG-NO-ORH-ORV-OLS)

LED 35 / 55 / 70

LEDD (TYPE 3 & 5)

## COLOR

### TEXTURED FINISH

BKTX Black  
BZTX Bronze  
GNDTX Dark Green  
GNTX Green  
BUTX Blue  
RDTX Red  
GYTX Grey  
TANTX Tan  
WHTX White

### FINE TEXTURED FINISH

BKST Black  
ANST Anthracite  
GYST Grey  
SANST Metallic Sand

### SMOOTH FINISH

SYSM Nu Sparkle Silver

## FITTER



PA1

PA3

PA6

## FINIAL



F1

F2

F3

F4

F5

## OPTIONS

CH: Decorative glass chimney  
S: Decorative silver painted spun cone  
PTR: Post top reducer  
HS: House side shield  
PBT: Button type photocell  
PTL: Twist lock photocell receptacle (only PRO600S)  
PTL1: Twist lock photocell receptacle c/w cover (only PRO600S)

AB: Brass accent  
AC: Copper accent  
AO: Chrome accent  
SPK: Decorative spikes  
LRM/F\_: Ladder rest