


QUATTRO

PROVINCIAL
series



PRO800

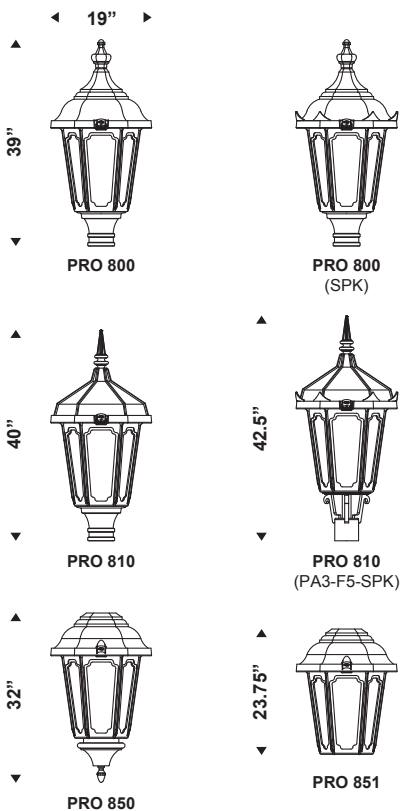


Provincial Series



QUATTRO
www.quattrolighting.com

The PRO800, PRO810 and PRO850 Series are made of a tapered octagonal aluminum cast housing c/w a cast aluminum hood and a decorative cast aluminum finial. The hood is assembled to the housing by means of an integrated hinge and locked by a latch. The opening system allows a tool free and hands free access to the lamp and ballast or LED device and driver. The head module is welded to a post top adapter. Both proposed fitters are designed to fit onto a 4" outside diameter pole or else, with the addition of a post top reducer, it could fit other pole dimensions. PRO850 and PRO851 offer a suspended mount.

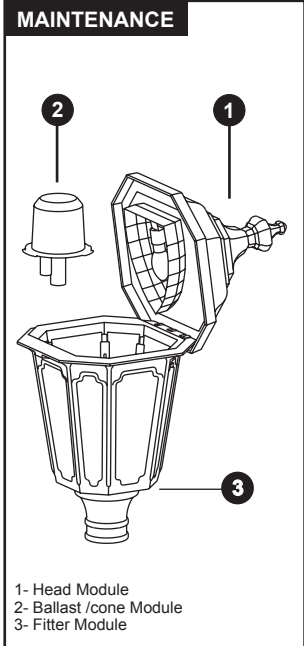

OPTIC		OG *	
ORH_* Full cut-off Reflector Horizontal lamp Decorative glass chimney or silver painted cone *Type 3 & 5		OG_*/QS (IP66) Non cut-off Glass refractor Vertical lamp *Type 3 & 5	
OCB_* OCB_*/QS (IP66) Full cut-off Reflector Horizontal lamp Decorative glass chimney or silver painted cone *Type 1, 2, 3 & 4		OLS_* Semi cut-off Louvers System Vertical lamp *Type 3 & 5	
ORV_* Semi cut-off Reflector Vertical lamp Decorative glass chimney or silver painted cone *Type 3 & 5		NO5 NO5/QS (IP66) Non cut-off Vertical lamp Type 5	
		L_* (IP66) Full cut-off LED Module Decorative glass chimney or silver painted cone *Type 3 & 5	

ORDERING INFO

WEIGHT: 54 lbs
E.P.A.: 2.7 sq ft

PRODUCT	OPTIC	LENS	WATT / SOURCE / SOCKET	VOLTAGE	COLOR	FITTER	FINIAL	OPTION
PRO800	OG3/QS	GPC	100 MH / MED	120	BKTX	PA1	F8	PBT

LENS		
IP66 THERMOFORMED GLOBE (QS)	IP54 LENS ASSEMBLY	
GAC: Clear Acrylic	GAC: Clear Acrylic	GAF: Frosted Acrylic
GPC: Clear Polycarbonate	GPC: Clear Polycarbonate	GGC: Clear Glass
GAO: Opal Acrylic	GAO: Opal Acrylic	GGB: Brushed Glass
GPO: Opal Polycarbonate	GPO: Opal Polycarbonate	
GAB: Brushed Acrylic	GAB: Brushed Acrylic	

VOLTAGE	
SINGLE TAP:	120 / 208 / 240 / 277 / 347 / 480
DUAL TAP:	DT1/_* (120-240) * = connected at DT2/_* (120-277) _____ volts
TRI TAP:	TT1/_* (120-208-240) TT2/_* (120-277-347)
QUAD TAP:	QT/_* (120-208-240-277)

WATT / SOURCE / SOCKET			
METAL HALIDE	50 / 70 / 100 / 150 / 175	MH	MED (Medium)
	70 / 100 / 150	MH	MOG (Mogul: OG/QS-NO/QS)
	70 / 100 / 150 / 250 / 400	MH	MOG (Mogul: OG-NO)

COLOR	
TEXTURED FINISH	FINE TEXTURED FINISH
BKTX Black	BKST Black
BZTX Bronze	ANST Anthracite
GNDTX Dark Green	GYST Grey
GNTX Green	SANST Metallic Sand
BUTX Blue	
RDTX Red	SMOOTH FINISH
GYTX Grey	SYSM Nu Sparkle Silver
TANTX Tan	
WHTX White	

Options: /EL Electronic Ballast /ID_* Step Dimming *6, 8 or 10 hours	
45 / 60 / 90 / 140	MH PGZ12
210 / 315	MH PGZ18
Options: /ID_* Step Dimming *6, 8 or 10 hours	

FITTER	
PA1	PA3

HIGH PRESSURE SODIUM	35 / 50 / 70 / 100	HPS	MED (Medium: OCB/QS-OCB)
	35 / 50 / 70 / 100 / 150	HPS	MED (Medium: ORH-ORV-OLS-OG/QS-NO/QS)
	50 / 70 / 100	HPS	MOG (Mogul: OG/QS-NO/QS)
	50 / 70 / 100 / 150 / 200 / 250 / 400	HPS	MOG (Mogul: OG-NO-ORH-ORV-OLS)

FINIAL	
F1	F2
F3	F4
F5	F8

LED	35 / 55 / 70	LEDD	(TYPE 3 & 5)
	31 / 45 / 48 / 65 / 68 / 91 / 99 / 140	LEDF	(TYPE 3 & 5)

OPTIONS	
CH: Decorative glass chimney	AB: Brass accent
S: Decorative silver painted spun cone	AC: Copper accent
PTR: Post top reducer	AO: Chrome accent
HS: House side shield	SPK: Decorative spikes
PBT: Button type photocell	LRM/F_: Ladder rest
PTL: Twist lock photocell receptacle (only PRO800 & PRO810)	
PTL1: Twist lock photocell receptacle c/w cover (PRO800/810)	