

QUATTRO

SIERRA


series



SRA400H




SRA422H-AC

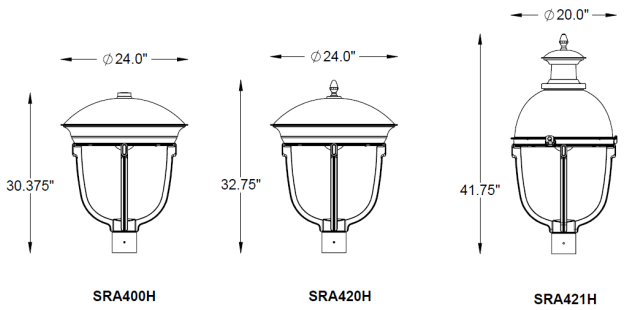

Sierra 400H serie

QUATTRO
www.quattrolighting.com

The hinge opening system of SRA400H series allows a tool-free fixture made of a seamless one-piece injection molded globe surmounted of spun aluminum hood provided with a decorative cast aluminum finial. The fitter is designed to fit onto a 4" outside diameter pole or, with the addition of a post top reducer, it could fit other pole dimensions. The hinged opening system allows a tool-free and hands-free access to the lamp and ballast or LED device and driver.

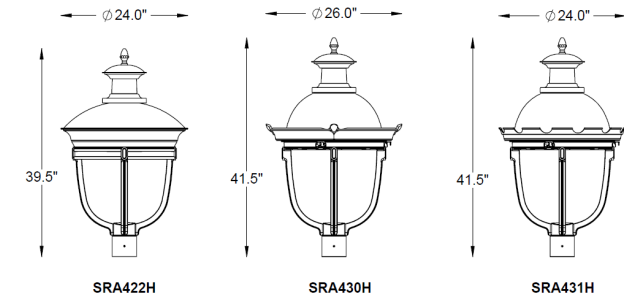

OPTIC		OCB_*	
L_*	Full cut-off	Full Cut-Off	
	LED Module	Reflector	
	IP66 Rated	Horizontal Lamp	
		IP66 Rated	
	* type 2,3,4 & 5		* type 1, 2, 3 & 4

E.P.A: 2.5 sq ft

WEIGHT: 44 lbs

ORDERING INFO


HID =WATT / SOURCE / SOCKET
or

PRODUCT	OPTIC	LED =WATT / ENGIN /Degrees Kelvin	VOLTAGE	COLOR	FINIAL	OPTION	OPTION
SRA422H	L3	85 LEDL 4.0	120	BKTX	F1	PBT	AC

LED		VOLTAGE	
35 to 140 W	LEDL (TYPE 2,3,4,5) (2700,3000,4000,5000 °K)	STANDARD	120 / 240 Volts
31 / 45 / 48 / 65 / 68 / 91 / 99 / 140W	LEDF (TYPE 3 & 5) (4000,5000 °K)	Upon request	347 / 480 Volts
* other Wattage and type upon request			

HID	
VOLTAGE	
SINGLE TAP: 120 / 208 / 240 / 277 / 347 / 480	
DUAL TAP:	DT1/_* (120-240) * = connected at _____ volts DT2/_* (120-277)
TRI TAP:	TT1/_* (120-208-240) TT2/_* (120-277-347)
QUAD TAP: QT/_* (120-208-240-277)	
WATT / SOURCE / SOCKET	
METAL	50 / 70 / 100 / 150 / 175 MH MED (Medium)
HALIDE	70 / 100 / 150 / 175 / 250 / 400 MH MOG (Mogul)
Options: /EL Electronic Ballast	
/D_* Step Dimming *6, 8 or 10 hours	
HIGH PRESSURE SODIUM	35 / 50 / 70 / 100 / 150 HPS MED (Medium) 50 / 70 / 100 / 150 / 200 / 250 / 400 HPS MOG (Mogul)

COLOR	TEXTURED FINISH	FINE TEXTURED FINISH
BKTX	Black	BKST Black
BZTX	Bronze	ANST Anthracite
GNDTX	Dark Green	GYST Grey
GNTX	Green	SANST Metallic Sand
BUTX	Blue	
RDTX	Red	SMOOTH FINISH
GYTX	Grey	
TANTX	Tan	SYSM Nu Sparkle Silver
WHTX	White	



OPTION

HS: House side shield	AB: Brass accent
PBT: Button type photocell	AC: Copper accent
PTL: Twist lock photocell receptacle	AO: Chrome accent
PTL1: Twist lock photocell receptacle c/w painted cover	