

# QUATTRO

## TERRA

series



TER220

# Terra Series



# QUATTRO

www.quattrolighting.com

The TER200 Series fixtures are made of a cast aluminum fitter provided with four cast aluminum arms and a heavy cast aluminum frame. A cast aluminum housing surmounted of a spun aluminum hood is assembled to the frame by means of an integrated hinge. The push button opening system allows a tool-free and hands-free access to the lamp and ballast or LED device and driver. In the case of the OCB optic, the removable ballast assembly is located within the fitter and is accessible by a tool-less rotary cap spring. The fitter is designed to fit onto a 4" outside diameter pole or else, with the addition of a post top reducer, it could fit other pole dimensions. The product comes with tempered, flat or sagged, glass lens. Regarding LED device configurations, no need for lens because the LED device is a whole unit and meets the IP66 standard.

## OPTIC


### OCB\_\*

Full cut-off Reflector Horizontal lamp \*Type 1 to 4  
**IP66 Rated**  
 (Only available for TER200 - TER220 - TER230)




### L\_\*


Full cut-off LED Module **IP66 Rated** \*Type 3 & 5




TER 200



TER 210



TER 220



TER 230

E.P.A: 2.1 sq ft

WEIGHT: 34 lbs

## ORDERING INFO

PRODUCT	OPTIC	LENS	WATT / SOURCE / SOCKET	VOLTAGE	COLOR	FINIAL	OPTION
TER230	OCB3	GGC	100 MH / MED	120	BKTX	F3	PBT

## LENS

- GGC:** Clear Flat Tempered Glass Lens
- GGB:** Brushed Flat Tempered Glass Lens
- GGSC:** Clear Tempered Glass Sagged Lens
- GGSB:** Brushed Tempered Glass Sagged Lens

## VOLTAGE

- SINGLE TAP: **120 / 208 / 240 / 277 / 347 / 480**
- DUAL TAP: **DT1/\_\* (120-240)** \* = connected at \_\_\_\_\_ volts  
**DT2/\_\* (120-277)**
- TRI TAP: **TT1/\_\* (120-208-240)**  
**TT2/\_\* (120-277-347)**
- QUAD TAP: **QT/\_\* (120-208-240-277)**

## WATT / SOURCE / SOCKET

METAL HALIDE **50 / 70 / 100 / 150** MH **MED** (Medium)  
**70 / 100 / 150** MH **MOG** (Mogul: TER220)

Options: /EL Electronic Ballast  
 /D\_\* Step Dimming \*6, 8 or 10 hours

**45 / 60 / 90 / 140** MH **PGZ12**  
**210 / 315** MH **PGZ18** (TER220)

Options: /D\_\* Step Dimming \*6, 8 or 10 hours

HIGH PRESSURE SODIUM **35 / 50 / 70 / 100 / 150** HPS **MED** (Medium)  
**50 / 70 / 100 / 150** HPS **MOG** (Mogul: TER220)

LED **35 / 55 / 70** LEDD (TYPE 3 & 5)  
**31 / 45 / 48 / 65 / 68 / 91 / 99 / 140** LEDF (TYPE 3 & 5)  
**140** LEDE (TYPE 3 & 5)

## COLOR

TEXTURED FINISH		FINE TEXTURED FINISH	
<b>BKTX</b> Black		<b>BKST</b> Black	
<b>BZTX</b> Bronze		<b>ANST</b> Anthracite	
<b>GNDTX</b> Dark Green		<b>GYST</b> Grey	
<b>GNTX</b> Green		<b>SANST</b> Metallic Sand	
<b>BUTX</b> Blue			
<b>RDTX</b> Red		SMOOTH FINISH	
<b>GYTX</b> Grey		<b>SYSM</b> Nu Sparkle Silver	
<b>TANTX</b> Tan			
<b>WHTX</b> White			


## FINIAL



## OPTIONS

- PTR:** Post top reducer
- PBT:** Button type photocell
- PTL:** Twist lock photocell receptacle
- PTL1:** Twist lock photocell receptacle c/w painted cover

## MAINTENANCE

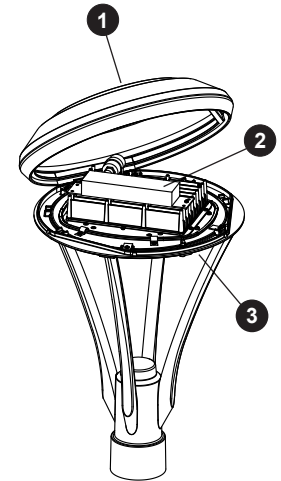

- 1- Head Module
- 2- Ballast Module
- 3- Lens Module